


# Fury Rheemglas® Gas Water Heater



**Available in 114, 151, 189, 284 and 379 Liter Tall, 114 and 151 Liter Short Models**

- Temperature and pressure relief valve included
- R-Foam® insulation process for superior heat retention
- Gasmaster™ burner with precision port alignment for even heat transfer
- Heat saving flue baffle design
- Model specific burners engineered for high BTU input
- LP models feature durable stainless steel burners designed specifically for LP gas and White Rodger Controls
- Side relief valve connection
- Maximum working pressure of 150 PSI (10 BARS)

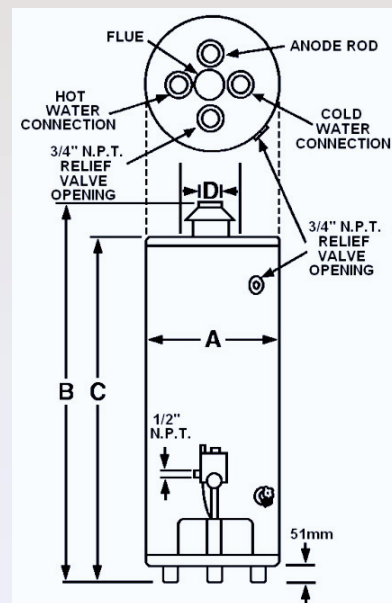

DESCRIPTION			FEATURES				DIMENSIONS (SHOWN IN MM)				
TANK LITER CAPACITY	HEIGHT DESCRIPTION	MODEL NUMBER	MJ/H		RECOVERY IN LITRES @ 50C RISE	FIRST HOUR DELIVERY LITERS	TANK DIAMETER A	VENT HEIGHT B	TANK HEIGHT C	VENT SIZE D	APPROX. SHIP WT. (KG.)
			NAT	LP							
114	TALL	25V30-6	33.7	-	122	201	400	1499	1422	76	44
114	TALL	25V30-6P	-	33.7	122	201	400	1499	1422	76	44
151	TALL	25V40-7	35.9	-	130	220	451	1524	1435	76	50
151	TALL	25V40-7P	-	35.9	130	220	451	1524	1435	76	50
189	TALL	25V50-2	38	-	138	257	502	1549	1448	76	65
189	TALL	25V50-2P	-	38	138	257	502	1549	1448	76	65
189	TALL	25V50-4	52.7	-	192	314	502	1549	1448	102	67
189	TALL	25V50-4P	-	52.7	192	314	502	1549	1448	102	67
284	TALL	25VR75	79.1	-	289	481	667	1638	1537	102	145
284	TALL	25VR75P	-	79.1	289	481	667	1638	1537	102	145
379	TALL	25V100	79.1	-	289	511	667	1727	1626	102	159
379	TALL	25V100P	-	79.1	289	511	667	1727	1626	102	159

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

**Rheem Manufacturing Company (Singapore) Pte Ltd**

No. 8 Pandan Crescent #02-02  
 Singapore 128464  
 Tel: 6872 1161 Fax: 6872 1151  
 Email: rheem@rheemmfg.com.sg  
 Website: www.rheemmfg.com.sg

Authorised Dealer