


Fury Rheemglas® Electric Water Heater



Available in 113, 152, 190, 247, 304 and 456 Liter Tall Models

- Temperature and pressure relief valve included
- Isolated tank design reduces conductive heat loss
- High efficiency resistored heating elements
- Anode rod equalizes aggressive water action
- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature
- Foam insulation
- Dual Element and Thermostat
- Maximum working pressure of 150 PSI (10 BARS)

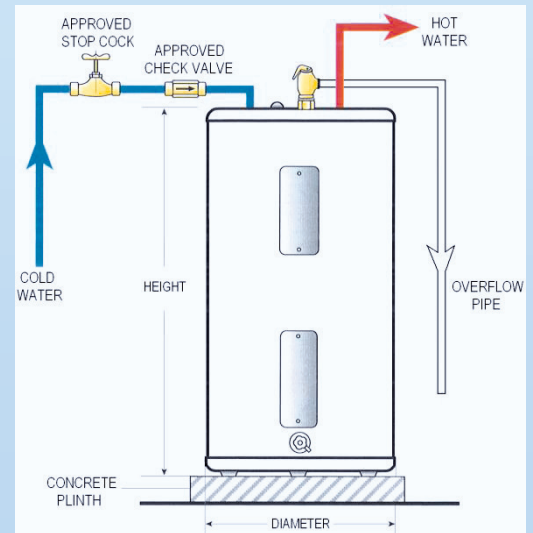

FLOOR MOUNTED MODELS

MODEL	TANK CAPACITY		VOLTAGE SINGLE PHASE	KW	HEATER DIMENSION		OPERATING WEIGHT (kg)	SHIPPING DIMENSION			APPROX. SHIP WEIGHT (Kg)
	USG	Litres			HEIGHT (mm)	DIAMETER (mm)		L (mm)	B (mm)	Ht (mm)	
82V30-2	30	114	240	4.5	1180	460	151	470	470	1200	36
82V40-2	40	151	240	4.5	1200	510	197	520	520	1225	43
82V52-2	50	189	240	4.5	1460	490	245	500	500	1490	49
82V66-2	65	246	240	5.5	1510	540	317	555	555	1530	68
82V80-2	80	303	240	5.5	1510	595	387	610	610	1530	80
82V120-2	120	454	240	5.5	1610	730	606	840	840	1750	147

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Manufacturing Company (Singapore) Pte Ltd

No. 8 Pandan Crescent #02-02
 Singapore 128464
 Tel: 6872 1161 Fax: 6872 1151
 Email: rheem@rheemmfg.com.sg
 Website: www.rheemmfg.com.sg

Authorised Dealer